


STANDARD Filter Housings

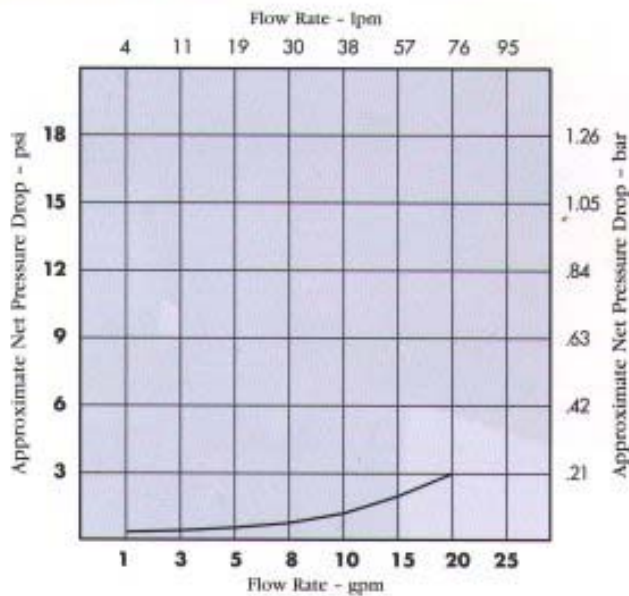

COMPONENT

The 150067, 150068, 150062, and 150001 are Tested and Certified by NSF International under ANSI/NSF Standard 42 - Conforms for material and structural integrity requirements only.

Housing Specifications and Performance Data

Model	Maximum Dimensions	Initial ΔP (psi) @ Flow Rate (gpm)
#10 Opaque	12-1/4" x 5-1/8" (311 mm x 150 mm)	1 psi @ 10 gpm (0.1 bar @ 3.8 lpm)
#10 Clear	12-5/8" x 5-1/4" (321 mm x 133 mm)	1 psi @ 10 gpm (0.1 bar @ 3.8 lpm)
#20	22-3/8" x 5-1/8" (568 mm x 150 mm)	1 psi @ 10 gpm (0.1 bar @ 3.8 lpm)

Materials of Construction

- **Housing** Polypropylene (Opaque)
Styrene Acrylonitrile (Clear)
- **O-Ring** Buna-N
- **Cap** Reinforced Polypropylene
- **Maximum Temperature** 125°F (52°C)
- **Button Assembly** 300-series Stainless Steel
- **Maximum Pressure** 125 psi (8.6 bar)

CAUTION: Filter must be protected against freezing, which can cause cracking of the filter and water leakage.

USFilter
Plymouth Products

VIVENDI
water company

502 Indiana Avenue • Sheboygan, WI 53081
USA/Canada: 800-645-0267 phone • 800-882-6652 fax
International: 920-451-9322 phone • 920-457-2417 fax

www.plymouthwater.com
Printed in U.S.A. 2/00 310051